


61501-1A1C-PD30

30W Type-C USB Power Delivery Charger with Tamper-Resistant Receptacles

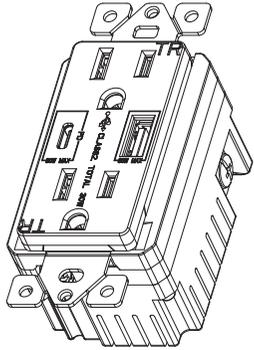

SPECIFICATIONS

Receptacle rating.....	15Amp, 125VAC, 60Hz
USB rating.....	Type A : 5V/9V,3A 12V,2.5A
.....	Type C : 5V/9V,3A 12V,2.5A
.....	PPS: 3.3V-12V,2.5A
Type A and Type C output.....	Type A: 5V,2.4A Type C: 5V,3A
Wire terminals.....	#14-#12 AWG
Operating temperature.....	-4 to 140°F (-20 to 60°C)
Receptacle dimension	3-3/4"×2-1/4"×3-3/16"

DESCRIPTION

Enerlites 61501-1A1C-PD30 in wall Charger meets the charging needs of multiple high-demand devices, like your MacBook Pro 16", iPad Pro (2018), and iPhone 13 series. With 30W USB-C power output, this power delivery fast charger can power the connected device at maximum speeds, freeing you from the need for an adapter and low battery anxiety.

FEATURES

- 30W Power Delivery (PD) 3.0 single port USB-C Charging power. This USB-C receptacle charger takes advantage of Power Delivery in this new era of fast charging, pumping out high wattage of up to 30W, significantly shortening charging time for larger PD-enabled devices like tablets, laptop computers and more.
- Type A provide up to 30W provides up to 4x faster speed than conventional charging.
- 2 shared power USB ports (1 (30W) + 1PD 30W) up to a 30W max output total, charge single device with full speed.
- Cleverly distributes 30w of power between 2 devices when charging simultaneously and supports high-speed charging up to 30W when a single USB-C device is connected.
- Use a USB-C to Lightning cable for Lightning devices and use a USB-C to USB-C cable for USB-C devices (cables not included)

WARNING

Turn the POWER OFF at the circuit breaker before installing the receptacle.


Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.

Use copper wire only.

This USB receptacle CANNOT be used if the outlet you are replacing has the top and bottom outlets controlled by separate circuit breakers.

WIRING DIRECTIONS

1. Turn off power at circuit breaker.
2. Identify the HOT, NEUTRAL, and GROUND wires in the wall box.
3. Insert wires into the terminal holes on the back side of the receptacle, then tighten the terminal screws to clamp wires in place.

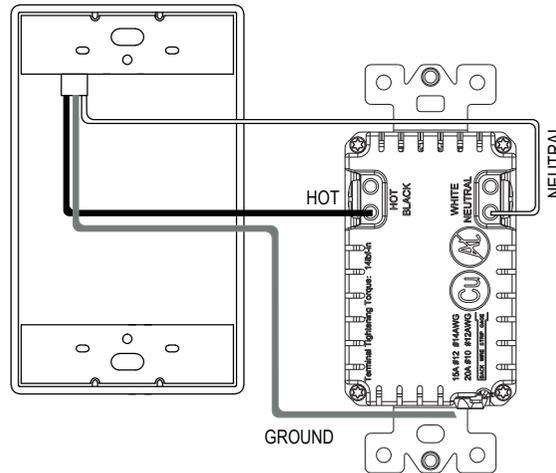

COMPATIBILITY

30W Type-C Power Delivery with PPS


You can now safely charge or power your electronics with up to 30 watts Programmable Power Supply (PPS). USB Type-C Power Delivery provides cooler, faster, and a broader range of charging. It is compatible with a wide range of electronic devices including, but not limited to Apple and Android devices. It is backwards compatible with USB 1.0, 1.1, 2.0, 3.0, and 3.1.

When the charger charges only one device:

USB-C Output: 5V/9V @ 3A, PPS 3.3-12V @ 2.5A (Max 30w)

USB-A Output: 5V/9V @ 3A, 12V @ 2.5A (Max 30w)

Be sure to use quality USB cables because the cable used will effect the speed of charging. We recommend the use of cables that are capable of 100W for maximum performance.

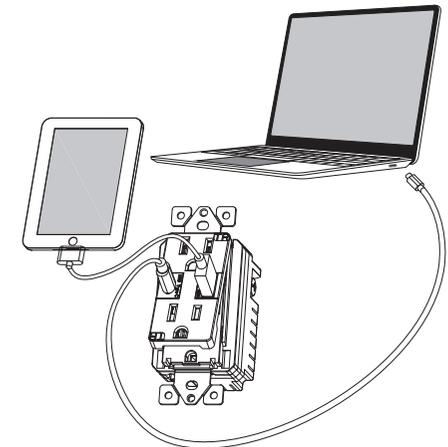

WIRING DIRECTIONS

This device is warranted to be free of material and workmanship defects for 2 years from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Enerlites, Inc. Warranties from other Enerlites products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Enerlites shall not be liable to the purchaser or end user customer of Enerlites products for direct, indirect, incidental, or consequential damages even if Enerlites has been advised of the possibility of such damages. Enerlites' total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.