

Sunco


Lighting made better.

User Manual

6" Slim

Selectable Gimbal

SKU: DL_SG6-WH-2750K

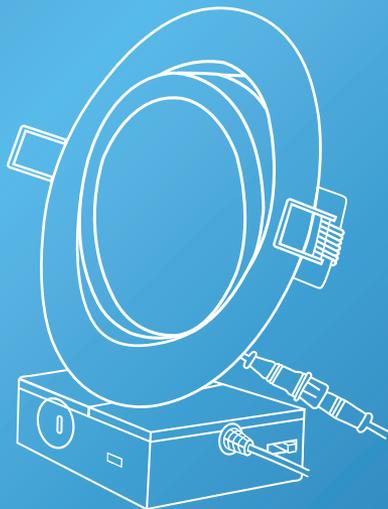


support@sunco.com
(844) 334-9938



What's in the Box?

Slim Downlight

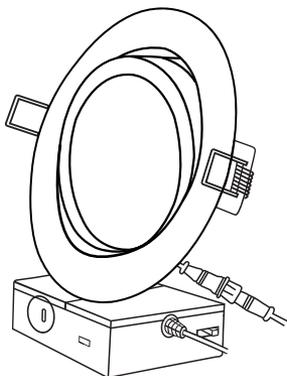

*Let there be light!
(literally)*



A

x1

Light Fixture



B

x1

Junction Box



C

x1

Installation Template



D


x3

Wire Nuts

Get Your Gear (Not Included)



Cable Connector



Hole Saw



Ladder



Wire Strippers

Before You Start

Safety Information

To reduce the risk of fire, electric shock, or physical injury:

- Turn off circuit breaker before installing this fixture.
 - This product should be installed by a person familiar with the construction and operation of the product the hazards involved. Safety eyeglasses and gloves are recommended.
 - Abide by related regional and local laws or regulations.
 - Proper grounding is required to ensure safety.
 - Do not alter, relocate, or remove wiring during installation.
 - Do not make or alter any open holes in wiring enclosure or electrical components during installation.
 - Check for shipping damage before installing. If the product is damaged, do not use it.
 - Keep fixture away from corrosive substances.
 - Suitable for damp locations at temperature ranging from -4°F -113°F. Not for use where directly exposed to water.
 - Clean the fixture regularly to ensure proper operation. Do not clean with harsh solvents.
- Use safety precautions and abide by regional and local laws or regulations.
 - This product is not compatible with 3rd party sensors.
 - This product is not compatible with photo controls.
 - This product is not compatible with occupancy sensors.
 - This product is not compatible with timing devices.

This device complies with Part 15 of the FCC rules.


Operation is subject to the following two conditions:

- 1.) This device may not cause harmful interference.**
- 2.) This device must accept any interference that may cause undesired operation. Please review all instructions carefully prior to installation.**

⚠ WARNING:


Cancer & Reproductive Harm- www.P65Warnings.ca.gov

Quickstart Guide




Step 1

Use template to cut hole.




Step 2

Connect supply & junction wires.



Step 3

Attach fixture to junction box.




Step 4

Insert fixture into ceiling.

Installation Guide (Cont.)

B

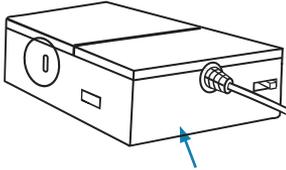

STEP 4


Note: This step applies exclusively to the Selectable Slims.

Slide the CCT Switch to choose from 5 color temperatures.

Insert junction box through ceiling hole.

New Construction: Secure to studs, joists, or similar fixed structural units.


Remodel: Do not require to secure to studs, joists, or similar fixed units.



STEP 5

a. Attach fixture to junction box using connector as shown on image (1).

b. Tighten connector by hand (2).

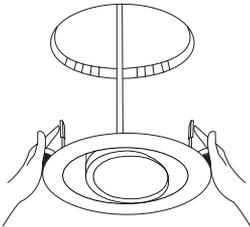

STEP 6

a. Adjust flexible optic position to aim light beam where needed. Gimbal rotates 350° and tilts 40°.

b. Raise spring clips to insert the luminaire in the ceiling opening. Turn on circuit breaker & test the light.

Product Details

Recommended Dimmers

Brand	Model
LUTRON	P-PKG1WB-WH
LUTRON	MACL-153M-WH
LUTRON	PD-6WCL-WH
LUTRON	AYCL-153P-WH
LUTRON	DVCL-153P-WH
LEVITON	D26HD-2RW
KASA SMART	HS220
KASA SMART	HS220P3

Scan for the full compatible dimmer list!



Specifications

Voltage	120 V	Average Lifetime	50,000 Hours
Wattage	12 W	Lumens	850 lm
Frequency	60Hz	Moisture Rating	Damp Rated
Beam Angle	120°	CRI	80+
Weight	0.64 lbs	Usage	Indoor
Housing Material	Aluminium+Plastic	IC Rated	Yes
Dimmable	YES	Warranty	7 Years

Common Troubleshooting

Feeling in the dark about an issue with your product? No worries! Our troubleshooting section is here to shed some light and provide you with easy-to-follow solutions for any problem.

If you still need some assistance, please feel free to contact us with any questions. Our team of lighting experts are happy to help brighten your day.

Installation

Light isn't turning on.

Double check if fixture is properly connected and circuit breaker hasn't been tripped.

Light unexpectedly fails.

For further assistance, contact our customer support.

Dimming

Light not dimming to lowest setting.

Ensure minimum dimmer load requirement is met.

Light not dimming smoothly.

Verify dimmer compatibility with fixture.

Light not compatible with dimmer switch.

Check light-dimmer compatibility. Consider purchasing compatible switch if necessary.

Flickering

Light is flickering when turning on.

Check that fixture wiring connections are secure.

Light flickering with other lights on the same circuit.

Check that the lights on the same circuit are not overloading the circuit.

Light flickering when turned on.

Verify fixture compatibility.

Light flickering when dimmed.

Verify dimmer switch compatibility.

Buzzing

Fixture buzzing with power outages.

Verify light is connected to surge protector securely.

Fixture buzzing with appliances or electronic devices.

Look for nearby interferences that can cause buzzing. Such as televisions, radios, computers, etc.

Fixture buzzing when dimmed.

Verify dimmer switch compatibility.

Sunco

Lighting made better.

support@sunco.com
(844) 334-9938

REV10