


INSTALLATION INSTRUCTIONS

Enerlites®

61501/62001-2C3

15/20A Duplex Tamper Resistant Receptacle
with Two Type C USB Charger Ports

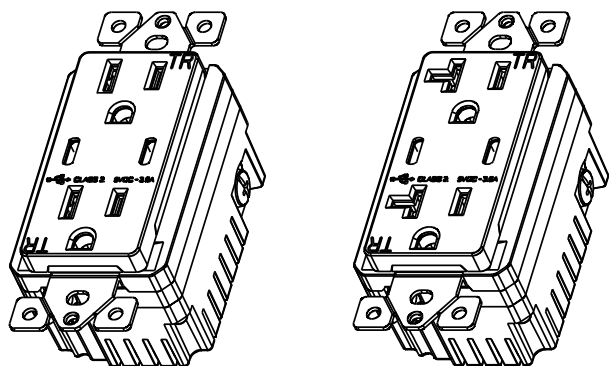

SPECIFICATIONS

Receptacle Rating.....15/20Amp, 125VAC, 60Hz
USB Type C Port:.....3Amp, 5VDC
USB Rating:.....Two USB ports total 3.6Amp, 5VDC
Wire Terminals.....#14-#12AWG
Operating Temperature.....-4 to 140°F (-20 to 60°C)
Receptacle Dimension3-3/4"x2-1/4"x3-3/16"

DESCRIPTION

The 61501-2C3/62001-2C3 USB Charger/Tamper-Resistant Receptacle offers two type C charging port and duplex Tamper-Resistant Receptacles. This device is able to deliver the optimum current accordingly to the device types and models attached, and charge any two devices up to 3.6 Amp charging capacity simultaneously, including smart phones, tablets. The USB Type C port are reversible and no up or down orientation. The receptacle is back and side wired for broad compatibility with diverse wiring needs. The product can fit in any standard in-wall outlet box

FEATURES

- Two USB ports with a total high-current power of 3.6A, 5VDC.
- Separately, each USB Type C output 3.0 amp.
- Charges most USB compatible electrical devices directly without an adapter.
- 2011 NEC Code compliant Tamper-Resistant Shutters.
- Replaces a standard duplex receptacle.
- Back wire terminals are for quick and easy installation.

WARNING

Turn the power off at the circuit breaker before installing the receptacle.

Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.


Use copper wire only.

This **surge** receptacle CANNOT be used if the outlet you are replacing has the top and bottom outlets controlled by separate circuit breakers.

WIRING DIRECTIONS

1. Insert wire(s) through terminal holes in the back, then tighten terminal screws.

- Connect HOT wire to the HOT terminal (brass screw)
- Connect NEUTRAL wire to the NEUTRAL terminal(silver screw)
- Connect GREEN or BARE wire to the GROUND terminal(green screw)

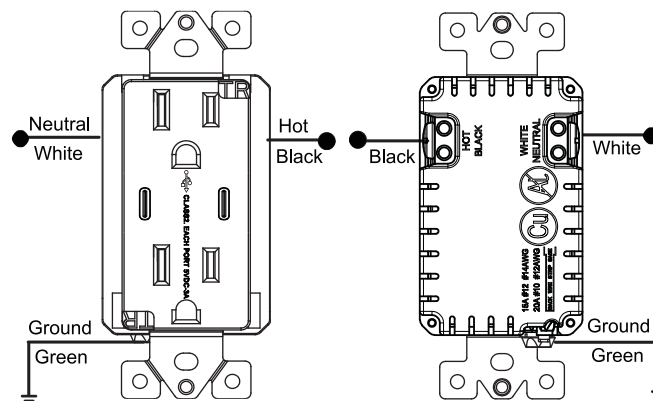

IMPORTANT SAFETY INSTRUCTIONS(SAVE THESE INSTRUCTION)

For Receptacle Model 61501-2C3:

"WARNING - Use only replacement part (Model 61501-2C3-SFA) with Receptacle (ENERLITES, Model 61501-2C3)"

For Receptacle Model 62001-2C3:


"WARNING - Use only replacement part (Model 62001-2C3-SFA) with Receptacle (ENERLITES, Model 62001-2C3)"

"WARNING - Risk of Fire or Electric Shock. Do not use this replacement part with any receptacle, other than the one specified on the replacement mark packaging and in these instructions."

COMPATIBILITY

This High Speed USB Charger/Tamper-Resistant Receptacle is compatible with a wide range of electronic devices including, but not limited to, the following:

- Tablets
- Mobile Phones
- Bluetooth™ Headsets
- Digital Cameras
- Nook e-reader
- GPS Devices
- HTC One X9™
- HTC One S9™
- Nexus 6P
- Lenovo ZUK Z1
- Samsung Galaxy S4™
- Samsung Galaxy Note 3™
- Samsung Galaxy J7™
- Other Smart Phones and USB Compatible products

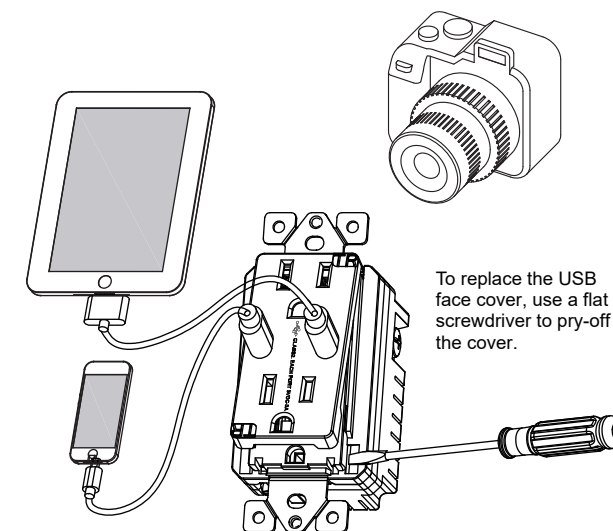

WARRANTY INFORMATION

This device is warranted to be free of material and workmanship defects for 2 years from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Enerlites, Inc. Warranties from other Enerlites products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Enerlites shall not be liable to the purchaser or end user customer of Enerlites products for direct, indirect, incidental, or consequential damages even if Enerlites has been advised of the possibility of such damages. Enerlites' total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.

© 2022 Enerlites Inc.
CA, U.S.A.
WWW.ENERLITES.COM
0205220196-01
REV 20240313