

SPECIFICATION SHEET


PRODUCT # : CL-659B-BK

• Area Lights

• Cast Brass

Fixture Specifications:

Housing:	Corrosion Resistant Cast Brass.	Gasket:	Silicone double gasket for water tight sealing.
Finish:	BK- Black Brass Also available in AB- Antique Bronze .	Knuckle:	Adjustable cast brass knuckle with thumb screw and ½" NPT threaded male hub on bottom.
Stem:	Solid Brass 18" pipe with ½" NPT on Bottom.	Mounting Spike:	Standard injection molded spike with ½" NPT threaded female hub.
Lens:	Clear and heat resistant polycarbonate.	Electrical Notes:	A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 8V-21V. Proper grease/lubricant is suggested on threaded parts during installation process.
Socket:	Top grade fixed ceramic bi-pin socket, with lamp retention clip to securely hold lamp in place	Warranty:	Ten (10) year warranty on fixture housing against manufacturer's defects.
Lamp:	12V, T3 LED Available in LED (2W & 2.5W) or without lamp. See Lamp guide below for more information.		
Wiring:	Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Silicone filled direct burial wire nut (CX-854) and quick-locking connectors (CX-LOC) are available from Corona Lighting.		

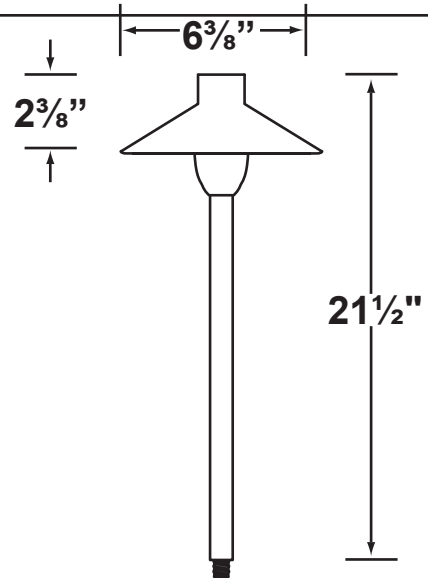

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-2W	2	360°	200	2700K	25,000	20 Watt
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDT3-AM*	2	360°	170	2000K	25,000	20 Watt

* AM- Amber color

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - lamp - wattage

Example: CL-659B-BK-L-EDT3-2W-3K

CL - 659B-BK - L-EDT3 - 2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET

PRODUCT # : CL-659B-BK

• Area Lights

• Cast Brass


Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub on top, **Black**



Ground Spikes

CX-645-BK 8½" x 3" Slotted Plastic Spike, **Black** (Included with fixture)

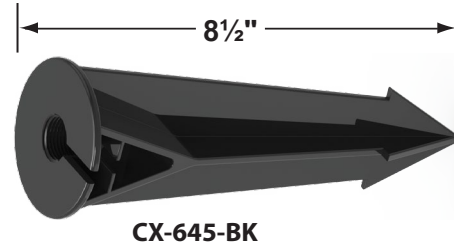

Mounting Canopies

CX-701-BK Aluminum Mini 3 Hole Round Canopy, ½ NPT, **Black**

CX-702-BK Aluminum Rectangular Canopy, ½ NPT, **Black**

CX-709-BK Aluminum Raised Canopy, ½" NPT, **Black**

CX-718-BK 5" Aluminum Canopy, 3-Hole ½" NPT, **Black**

CX-721B-BK Brass Tree mount Canopy with 15" Rubber Strap stretches to 22", **Black Brass**

CX-722B-BK BrassTree mount Canopy with 22" Rubber Strap stretches to 33", **Black Brass**


CX-723B-BK Aluminum Tree mount Canopy with 31" Rubber Strap stretches to 45", **Black Brass**



Cable Connectors

CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**

CX-LOC Quick-locking gel filled wire connector Two / Pack, **Tan**

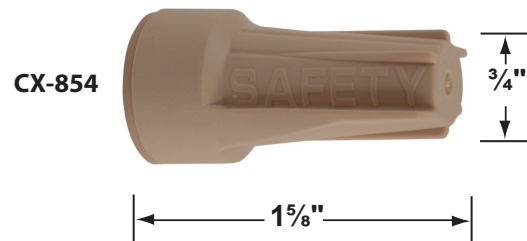

Dimmers

CX-DIM-100 100W, Low Voltage Dimmer Switch. Use with T-LT Series Transformers, **Black**

CX-DIM-100



ACCESSORIES SHEET


PRODUCT # : CL-659B-BK

• Area Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

T-LTF60	60W, 12V, Compact Mini Transformer
T-LT75	75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150	150W, 12-15V, Single Circuit Transformer.
T-LT300	300W, 12-15V, Single Circuit Transformer.
T-LT600	600W, 12-15V, Dual Circuit Transformer.
T-LT900	900W, 12-22V, Triple Circuit Transformer.
T-FIDT	Field Installed Plug-in Digital Timer.
T-FIT	Field Installed Plug-in Mechanical Timer.
T-TR-FIP	Field Installed Plug-in Photocell

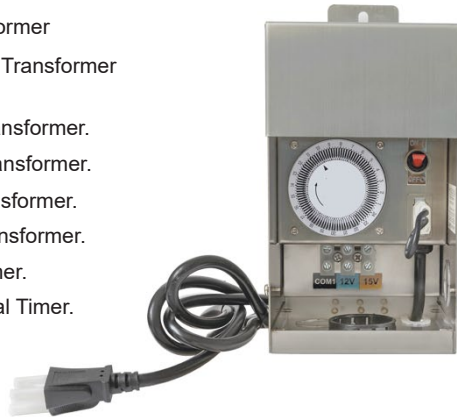

T-LT75




T-LT150



T-FIDT



T-LT300



T-TR-FIP