


# INSTALLATION INSTRUCTIONS

## 62000-3A2C6

5 Port USB Power Station Charger

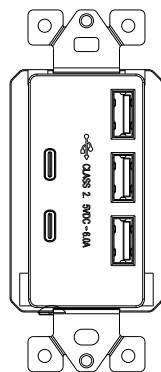

### SPECIFICATIONS

Voltage.....	125VDC
USB Rating.....	5 USB ports with total 6.0 Amp, 5VDC
USB Type-A.....	5V/2.4A
USB Type-A1+A2+A3.....	5V/3.0A
USB Type-C.....	5V/3.0A
USB Type-C1+C2.....	5V/3.0A
Wire Terminals.....	#14-#12 AWG
Operating Temperature.....	-4 to 140°F (-20 to 60°C)
USB Compatibility.....	USB 1.1/2.0/3.0 devices, including Apple products
Receptacle Dimension .....	3-3/4"×2-1/4"×3-3/16"

### DESCRIPTION

Our High Speed USB ports deliver the most advanced charging technology and optimizes current by using a smart chip to reduce charging time to devices. It is able to charge four devices simultaneously, including smart phones, tablets, e-readers, cameras and MP3 players. You'll have the ability to charge virtually any device without the use of bulky adapters that can be lost or misplaced.

### FEATURES

- 5 USB High Speed charger with a total of 6.0 Amp, 5VDC.
- Charges most USB compatible devices directly without an adapter.
- Replaces a standard duplex receptacle.
- Wire terminals are designed for easy installation from the back wire.

### WARNING

**Turn the POWER OFF at the circuit breaker before installing the USB Receptacle.**


Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.

Use copper wires only.

This USB receptacle **CANNOT** be used if the outlet you are replacing has the top and bottom outlets controlled by separate circuit breakers.

### WIRING DIRECTIONS

1. Insert wire(s) through terminal holes in the back, then tighten terminal screws.
  - Connect BLACK/HOT wire to the HOT terminal (brass screw).
  - Connect WHITE/NEUTRAL wire to the NEUTRAL terminal (silver screw)
  - Connect GREEN/GROUND wire to the GROUND terminal (green screw).

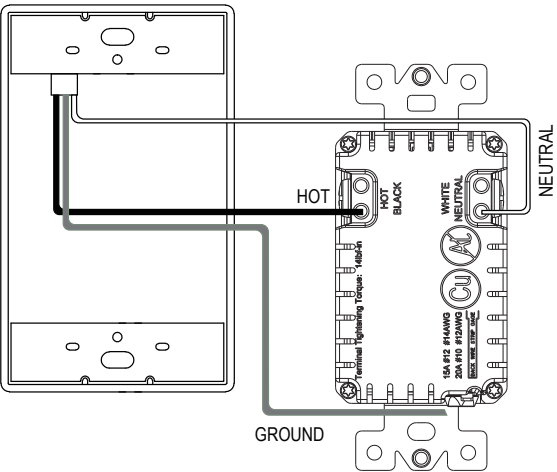

### WARRANTY INFORMATION

This device is warranted to be free of material and workmanship defects for 2 years from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Enerlites, Inc. Warranties from other Enerlites products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Enerlites shall not be liable to the purchaser or end user customer of Enerlites products for direct, indirect, incidental, or consequential damages even if Enerlites has been advised of the possibility of such damages. Enerlites' total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.

