


INSTALLATION INSTRUCTIONS

Enerlites®

55307

Decorator LED Dimmer
Single Pole / 3-Way

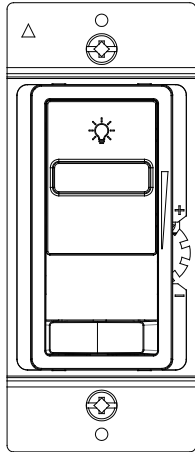

SPECIFICATIONS

Voltage	120VAC, 60Hz
Incandescent/ Halogen.....	300W
Dimmable LED and CFL.....	200W
Operating Temperature.....	32°F-104°F

DESCRIPTION/ FEATURES

The 55307 is slider dimmer control for both Incandescent/Halogen bulbs and dimmable LED & CFL bulbs. This dimmer is specifically designed to replace a standard light switch with a single dimmer switch.

- Controls lights up to 200-Watt of LED lighting load
- Slide up to on/brighten and down to dim/off
- Designed for single pole or 3-Way

WARNING

Turn off the power at the circuit breaker before installing the dimmer.

Please read and understand these instructions before proceeding with the installation. This device is designed for installation in accordance with the National Electric Code and local regulations. We recommend that a qualified electrician performs the installation. Ensure that the circuit breaker or fuse(s) are turned off and power is disconnected before wiring the device.


CAUTION - To reduce the risk of overheating and possible damage to other equipment, Do Not Install to control a receptacle, motor-operated appliance, fluorescent lighting fixture or a transformer supplied appliance.

- Risk of Electric Shock - More than one disconnect switch may be required to de-energize the device before servicing


Use copper wire only

WIRING DIRECTIONS

1. Insert the HOT wire to the dimmer's HOT terminal.
2. Insert the LOAD wire to the dimmer's Load terminal.
3. Insert the GROUND wire to the dimmer's GROUND terminal.

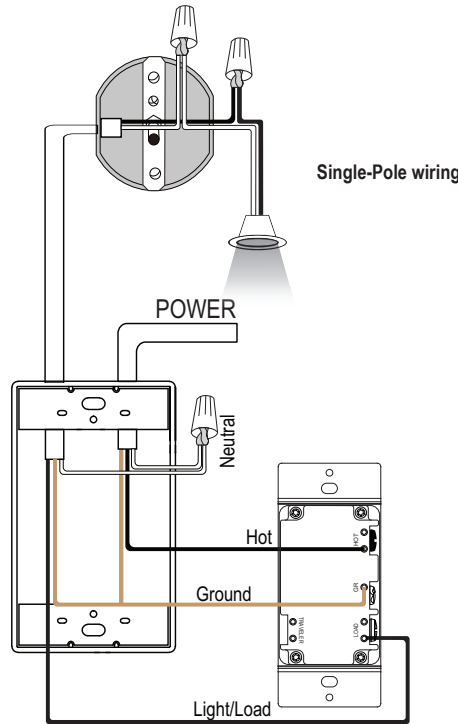

OPERATING INSTRUCTIONS

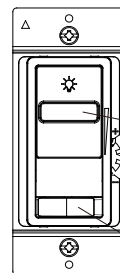


Note: Brightness level can be adjusted prior to turning the lights on.

Fine tuning.

1. Set dimming slider to lowest level before adjusting.
2. Use this dial to adjust the lowest dimming level for bulbs that flicker.

On/ Off switch on single-pole or 3-way circuit

3-Way wiring

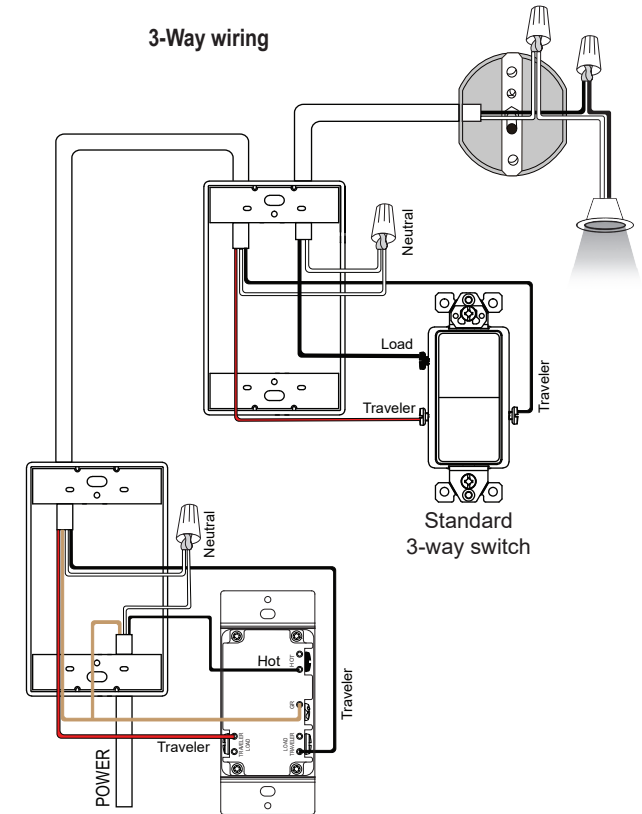

WARRANTY INFORMATION

This device is warranted to be free of material and workmanship defects for 2 years from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Enerlites, Inc. Warranties from other Enerlites products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Enerlites shall not be liable to the purchaser or end user customer of Enerlites products for direct, indirect, incidental, or consequential damages even if Enerlites has been advised of the possibility of such damages. Enerlites' total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.



© 2024 Enerlites Inc. CA, U.S.A.
WWW.ENERLITES.COM
0203240241
REV 20232103