

SPECIFICATION SHEET

PRODUCT # : CL-550B-BK

• Directional Lights


• Cast Brass

Fixture Specifications:

Housing:	Corrosion resistant cast brass	Gasket:	Silicone double gasketed for water tight sealing
Finish:	BK- Black Brass <i>Also available in AB- Antique Bronze</i>	Knuckle:	Adjustable cast brass knuckle with thumb screw and 1/2" NPT threaded male hub on bottom.
Lens:	Clear and heat resistant convex glass.	Mounting Spike:	Standard injection molded spike with 1/2" NPT threaded female hub.
Socket:	Top grade fixed ceramic bi-pin socket, with lamp retension clip to securely hold lamp in place.	Electrical Notes:	A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.
Lamp:	12V, MR-16 LED Available in 3.5W, 5W, 6W or without lamp. See lamp guide, below for more information.	Warranty:	Ten (10) year warranty on fixture housing against manufacturer's defects.
Wiring:	Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Silicone filled direct burial wire nut (CX-854) and quick-locking connectors (CX-LOC) are available from Corona Lighting.		



3.5W, 5W and 6W

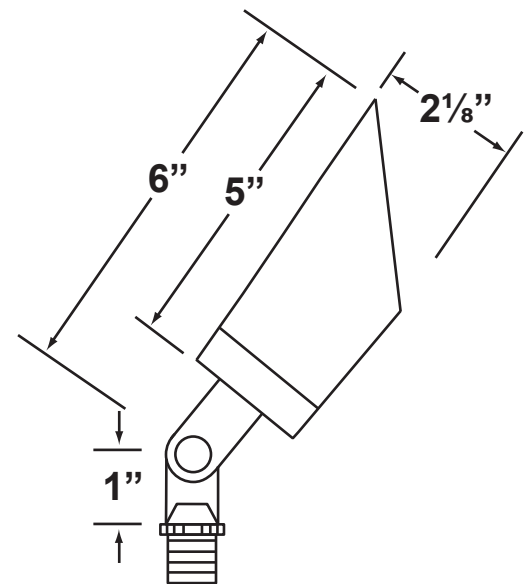

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-ED16-3W-SP	3.5	15° Spot	270	2700K	50,000	25 Watt
L-ED16-3W-FL	3.5	45° Flood	270	2700K	50,000	25 Watt
L-ED16-3W-WF	3.5	60° Wide Flood	270	2700K	50,000	25 Watt
L-ED16-5W-SP	5	15° Spot	350	2700K	50,000	40 Watt
L-ED16-5W-FL	5	45° Flood	350	2700K	50,000	40 Watt
L-ED16-5W-WF	5	60° Wide Flood	350	2700K	50,000	40 Watt
L-ED16-COB5W-SP	5	15° Spot	450/470	2700K/3000K	50,000	50 Watt
L-ED16-COB5W-FL	5	38° Flood	450/470	2700K/3000K	50,000	50 Watt
L-ED16-COB5W-WF	5	60° Wide Flood	450/470	2700K/3000K	50,000	50 Watt
L-ED16-6W-SP	6	15° Spot	600	2700K/3000K	50,000	75 Watt
L-ED16-6W-FL	6	38° Flood	600	2700K/3000K	50,000	75 Watt
L-ED16-6W-WF	6	60° Wide Flood	600	2700K/3000K	50,000	75 Watt

■ Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - lamp - wattage - lamp angle

CL - 550B-BK - L-ED16 - 5W - FL

Example: CL-550B-BK-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.


PRODUCT # : CL-550B-BK

• Directional Lights

• Cast Brass

Mounting Pedestals

- CX-601-BK 1" PVC Mounting Pedestal, 1/2" NPT, **Black**
- CX-601-VG 1" PVC Mounting Pedestal, 1/2" NPT, **Verde Green**
- CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**
- CX-603-VG 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Verde Green**




CX-603-BK

- CX-604-BK 1" PVC Adjustable Mounting Pedestal, 1/2" NPT, **Black**
- CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**
- CX-621-VG 1" PVC Cap, 1/2" NPT, **Verde Green**
- CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**
- CX-622-VG 2" PVC Cap, 1/2" NPT, **Verde Green**
- CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**
- CX-624-VG 3" PVC Cap, 1/2" NPT Female Brass Hub, **Verde Green**

Ground Spikes

- CX-642-BK 8.5" ABS Spike, 1/2" NPT, **Black**
- CX-642-BZ 8.5" ABS Spike, 1/2" NPT, **Bronze**
- CX-643-BZ 8.5" ABS Spike, 1/2" NPT, **Bronze**

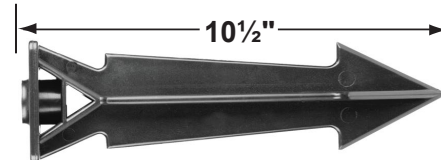

CX-647-BK

- CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**
- CX-646-BR 8" ABS Spike, 1/2" NPT, **Natural Brass**
- CX-646-SS 8" ABS Spike, 1/2" NPT, **Stainless Steel**
- CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

Cable Connectors

- CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**
- CX-LOC Quick-locking gel filled wire connector
Two / Pack, **Tan**

CX-854



CX-718-BK

CX-722B-BK

CX-709-BK

Mounting Canopies

- CX-701-BK Aluminum Mini 3 Hole Round Canopy, 1/2" NPT, **Black**
- CX-702-BK Aluminum Rectangular Canopy, 1/2" NPT, **Black**
- CX-709 Aluminum Raised Canopy, 1/2" NPT.
Finishes: **BK-** Black, **BZ-** Bronze, **WH-** White
- CX-718 5" Aluminum Canopy, 3-Hole 1/2" NPT.
Finishes: **BK-** Black, **BZ-** Bronze, **WH-** White
- CX-721B-BK Brass Tree mount Canopy with 15" Rubber Strap stretches to 22", **Black Brass**
- CX-722B-BK Brass Tree mount Canopy with 22" Rubber Strap stretches to 33", **Black Brass**
- CX-723B-BK Brass Tree mount Canopy with 31" Rubber Strap stretches to 45", **Black Brass**


PRODUCT # : CL-550B-BK

• Directional Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

T-LTF60	60W, 12V, Compact Mini Transformer
T-LT75	75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150	150W, 12-15V, Single Circuit Transformer.
T-LT300	300W, 12-15V, Single Circuit Transformer.
T-LT600	600W, 12-15V, Dual Circuit Transformer.
T-LT900	900W, 12-22V, Triple Circuit Transformer.
T-FIDT	Field Installed Plug-in Digital Timer.
T-FIT	Field Installed Plug-in Mechanical Timer.
T-TR-FIP	Field Installed Plug-in Photocell

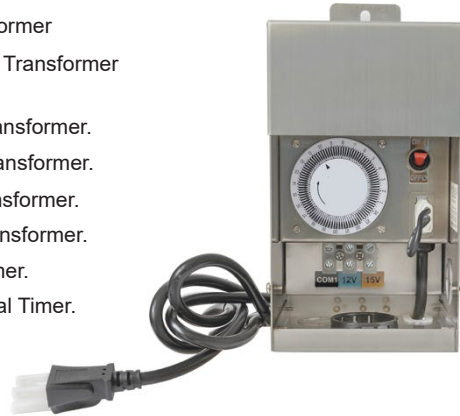

T-LT75



T-LT150



T-LT300



T-FIDT

Special Lenses & Honeycomb Louvers

CX-238	MR-16 Snap-on holder, Silver Plated
CX-239	MR-16 honeycomb louver, Black
CX-240-AM	MR-16 color lens, Amber
CX-240-BL	MR-16 color lens, Blue
CX-240-GR	MR-16 color lens, Green
CX-240-RD	MR-16 color lens, Red
CX-240-YL	MR-16 color lens, Yellow
CX-241	MR-16 lens, Linear Spread
CX-242	MR-16 lens, Frosted
CX-243	MR-16 lens, Prismatic

• For MR-16 Lenses and Louvers, you will need the CX-238



T-TR-FIP

Dimmers

CX-DIM-100 100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**



CX-DIM-100