




Documents



Others 1

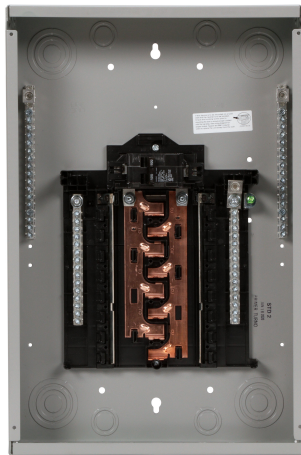

Cut Sheets 2

Certificates

Certificate of suitability UL

Electricity

Ampacity	100 A
Voltage / between phase and Ground (GND) / rated value	120 V
Voltage / between phase and phase / rated value	240 V

General Technical Data

Configuration of the busbars	COPPER BUS
Phase number	1
Suitability for operation	RESIDENTIAL AND LIGHT COMMERCIAL ELECTRIC DISTRIBUTION
Number of circuits / in a trunking unit	32

Mechanical Design

Design of the housing	TYPE 1
Size of the circuit-breaker	100A
Number of width units / for installation width	16

Model

product brand name	SIEMENS
Product type designation	PLUG-ON NEUTRAL READY PRO SERIES
Special product feature	GREY TRIM
Product sub brand name	LOAD CENTERS

Switching Capacity

Switching capacity current / acc. to EN 22000 A
60898 / rated value

Product Selector Information

Product Type	Load Center
Main Type	Main Breaker
Amp Rating	100
Phase	Single Phase (1PH - 3W)
Enclosure Type	Indoor
Bus Material	CU
No. of 1 inch Spaces	16
No. of Circuits	32
Load Center Type	Load Center
Load Center Series	a) PN -1ph CU bus Plug-on Neut
Trim Color – Mounting Description	A) Gray - Standard Flush/Surface Combo



Brochures 3




Application and Selection Guide
4




Application and Selection Guide
5



Replacement Part Catalog 6



Drawing 7



Speed Fax Sections 8