




Documents

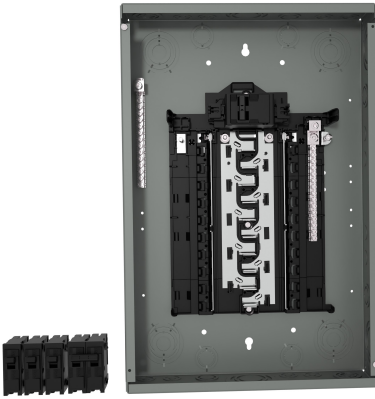

Others 1

Certificates

Certificate of suitability UL

Electricity

Ampacity	100 A
Voltage / between phase and Ground (GND) / rated value	120 V
Voltage / between phase and phase / rated value	240 V

General Technical Data

Configuration of the busbars	ALUMINUM BUS
Phase number	1
Suitability for operation	RESIDENTIAL AND LIGHT COMMERCIAL ELECTRIC DISTRIBUTION
Number of circuits / in a trunking unit	20

Mechanical Design

Design of the housing	TYPE 1
Size of the circuit-breaker	100A
Number of width units / for installation width	20

Model

product brand name	SIEMENS
Product type designation	PLUG-ON NEUTRAL READY STANDARD SERIES
Special product feature	GREY TRIM/ VALUE PACK
Product sub brand name	LOAD CENTERS

Switching Capacity

Switching capacity current / acc. to EN 22000 A
60898 / rated value

