


2x2 Dual Selectable Panel


Use the slider switch on the back of the ceiling panel to select your preferred color temperature (4000K, 5000K, 6000K) during installation. Dust-proof and dimmable (0-10V), this fixture is suitable for recessed or suspended installation in standard 2x2 drop ceilings.

MODELS

PN_SM2x2-40W-0K-#PK

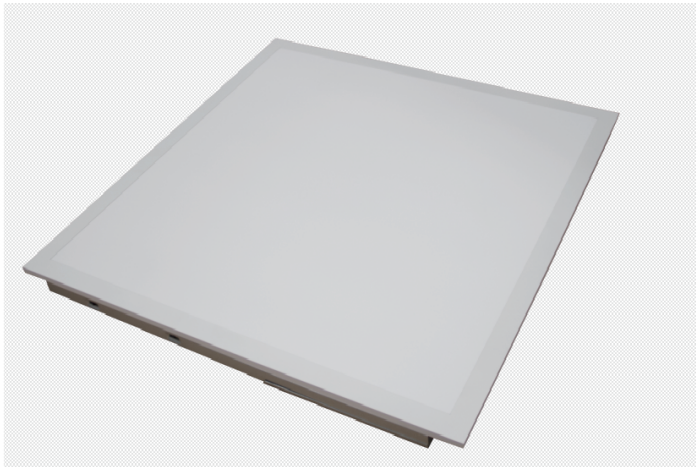

LIGHT DISTRIBUTION ANGLE

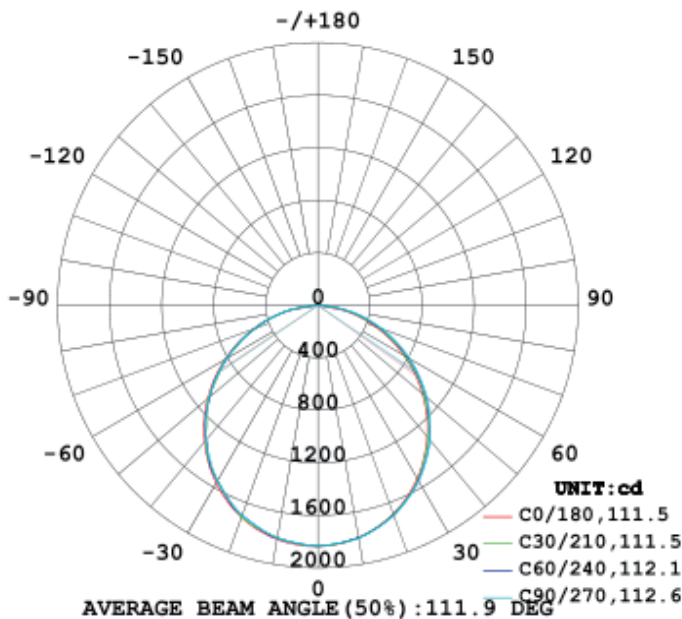

SPECIFICATIONS

Voltage	120-277V
Wattage	20W/30W/40W
Power Factor	>0.9
Current	0.44A

LIGHTING PERFORMANCE

Lumens	2200lm/3300lm/4400 lm
Equivalency	100W
Frequency	50/60 Hz
Color Rendering Index	80
Dimmable	0-10V
Efficiency	125 lm/w
Color Temperature	4000K/5000K/6000K

ENVIRONMENT

Operating Temperature	-4° F - 113° F
Moisture Rating	Damp Location

CONSTRUCTION

Housing Material	SPCC + PC
------------------	-----------

LIFETIME

Average Lifetime	50,000+ Hrs
Warranty	7 Years

CERTIFICATIONS

