


Enerlites®

Z-WAVE SMART DIMMER

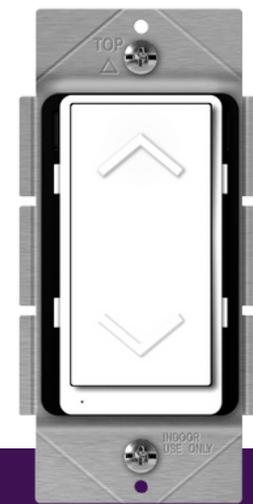

MODEL NO: ZW500DM-PLUS

DESCRIPTION

The Z-Wave ZWN500DM-PLUS is an in-wall smart dimmer switch controlled with advanced Z-Wave technology. Unique wiring method allows for multiple switches to control a single load. This smart dimmer switch requires a connection to a compatible Z-Wave hub to enable wireless controls (sold separately). Connected devices are also compatible with voice commands through Amazon Alexa or Google Assistant.

FEATURES

- Alexa/Google Home voice control compatible - requires a Z-Wave Hub
- Increased energy efficiency with our Smart Meter Energy Monitoring technology
- Works with all certified Z-Wave devices (backwards compatible)
- Requires in-wall installation with hard-wired connections - neutral wire required
- Compatible with different loads
- Control many devices with a single controller locally, or via a computer/ mobile phone remotely
- Wireless range: up to 100 feet (30 meters)

SPECIFICATIONS

Voltage	120VAC, 60Hz
Signal Frequency	908.42 MHz
Incandescent	600W
Dimmable LED and CFL	150W

TESTING & CODE COMPLIANCE



APPLICATIONS

- Homes
- Apartments
- Condominiums
- Offices
- Hotels
- Restaurants

SPECIFICATION SUBMITTAL

Job Name

Job Number

Notes