

# Sunco

Lighting made better.

User Manual

## 4ft LED Ready 2-Lamp Single-Ended Wraparound Light Fixture

SKU:LRF\_4WR\_2T8-WH




support@sunco.com  
(844) 334-9938




# What's in the Box?


## 2-Lamp Wraparound Fixture

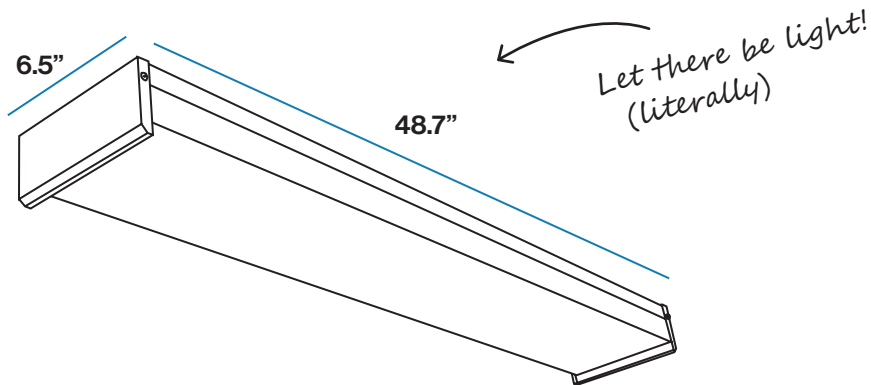

## Get Your Gear (Not Included)




Drill



Screwdriver



Ladder



Wire Strippers

# Before You Start

## Safety Information

To reduce the risk of fire, electric shock, or physical injury:

- Turn off circuit breaker before installing this fixture.
- This product should be installed by a person familiar with the construction and operation of the product the hazards involved. Safety eyeglasses and gloves are recommended.
- Abide by related regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Do not alter, relocate, or remove wiring during installation.
- Do not make or alter any open holes in wiring enclosure or electrical components during installation.
- Check for shipping damage before installing. If the product is damaged, do not use it.
- Keep fixture away from corrosive substances.
- Suitable for damp locations at temperature ranging from -40°F to 122°F. Not for use where directly exposed to water.
- Clean the fixture regularly to ensure proper operation. Do not clean with harsh solvents.
- Use safety precautions and abide by regional and local laws or regulations.
- Not compatible with dimmers.
- This product is not compatible with 3rd party sensors.
- This product is not compatible with photo controls.
- This product is not compatible with occupancy sensors.
- This product is not compatible with timing devices.

**⚠ WARNING:**

Cancer & Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**2.) This device must accept any interference that may cause undesired operation. Please review all instructions carefully prior to installation.**


This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

1.) This device may not cause harmful interference.

## Installation Guide

### STEP 1

OFF ON




a. Turn off circuit breaker before installation.

## Installation Guide (Cont.)

### STEP 2

a. Remove wraparound lens by loosening screws from one side of light fixture ends.




### STEP 3

a. Tombstones are wired single-ended. Thread light wires through center knockout.

b. Connect light wires with supply wires:

- Black to Black (Live) • White to White (Neutral)
- Green to Bare Copper (Ground)

Note: Do not hook up supply wires through Side "B" of the lamps.  
Do not modify the single-ended wiring.




### STEP 4

a. Place wraparound lens to fixture, then securely tightly with screws from Step 2b.

b. Install fixture to ceiling using mounting screws (not included) for surface mount.

c. Insert T8 tube light to installed lamp holders, then twist them into place.

d. Turn on circuit breaker and test light.



# Common Troubleshooting

## Specifications

<b>Voltage</b>	120 to 277 V	<b>Material</b>	Metal Sheet
<b>Moisture Rating</b>	Damp Rated	<b>Usage</b>	Indoor
<b>Tombstone Type</b>	Non-Shunted	<b>Weight</b>	6.39lbs
<b>Lamp Holder Type</b>	G13 Base	<b>Wiring Type</b>	Single-Ended

Feeling in the dark about an issue with your product? No worries! Our troubleshooting section is here to shed some light and provide you with easy-to-follow solutions for any problem.

If you still need some assistance, please feel free to contact us with any questions. Our team of lighting experts are happy to help brighten your day.

## Installation

Light isn't turning on.	Double check if fixture is properly connected and circuit breaker hasn't been tripped.
Light unexpectedly fails.	For further assistance, reach out to customer support.

## Flickering

Light is flickering when turning on.	Check that fixture wiring connections are secure.
Light flickering with other lights on the same circuit.	Check that the lights on the same circuit are not overloading the circuit.
Light flickering when turned on.	Verify fixture compatibility and that it is grounded.
Light flickering when dimmed.	Light is not compatible with dimmer.

## Buzzing

Fixture buzzing with power outages.	Verify light is connected to surge protector securely.
Fixture buzzing with appliances or electronic devices.	Look for nearby interferences that can cause buzzing. Such as televisions, radios, computers, etc.
Fixture buzzing when dimmed.	Light is not compatible with dimmer.

# Sunco

Lighting made better.