



WWW.CORONALIGHTING.COM

1633 Staunton Ave  
Los Angeles, CA 90021

TEL. FAX.

(800) 727-9262 (800) 727-9957

(213) 747-4500 (213) 747-3234

ARCHITECTURAL GRADE SERIES

# SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

## PRODUCT # : CL-733B

•Path Lights

• Cast Brass

### Fixture Specifications:

**Housing & Shroud:** Corrosion resistant cast brass.

**Stem:** Solid brass pipe with 1/2" NPT on bottom

**Finish:** Available in **AB- Antique Bronze** and **GM- Gun metal**  
Finish will vary due to artistic process

**Lens:** Frosted and heat resistant tempered flat glass.  
Supplied with extra clear glass lens, linear glass, and honeycomb louver

**Socket:** Top grade fixed ceramic bi-pin socket.

**Lamp:** 12V, T3 halogen, 35W max. L-20T3 (20w) standard.  
LED lamps available in 2W and 2.5W, with 2700K-warm white or 3000K-cool white color temperature. Xenon and halogen lamps also available.

**Gasket:** Silicone gasket for water tight sealing.

**Knuckle:** Adjustable cast brass knuckle with thumb screw.

**Wiring:** Fixture is prewired with a 3ft, 18-2 direct burial cord. Wire connector sold separately. Universal connector (**CX-839**) or silicone filled wire nut (**CX-854**) is available from Corona Lighting.



**Mounting Spike:** Standard injection molded spike with 1/2" NPT threaded female hub.

**Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting.  
Voltage range for 12V halogen lamps are 11V-12.5V  
Voltage range for LED lamps are 8V-21V.  
Proper grease/lubricant is suggested on threaded parts during installation process.

**Warranty:** Limited lifetime warranty on fixture housing and stem against manufacturer's defects.



CL-733B-AB  
18" Standard  
stem shown

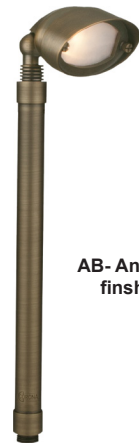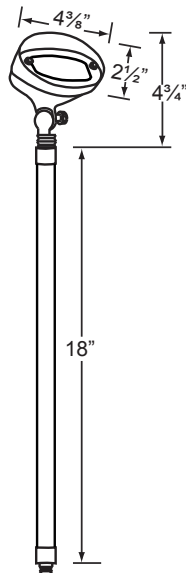

Stem  
option

AB- Antique Bronze  
finish is shown

CL-733B-AB-12  
12" Stem shown



2W and 2.5W

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-2W	2	360°	200	2700K	25,000	20 Watt
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDT3-AM	2	360°	170	2000K	25,000	20 Watt

### AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
L-10T3	10		120	2950K	2,000
L-20T3	20		300	2950K	2,000
L-10T3/SC	10		120	2950K	2,000
L-10T3/SC	20		300	2950K	2,000

• AM- Amber color

For more additional Lamps, and accessories visit [Coronalighting.com](http://Coronalighting.com)

### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering a halogen or xenon lamp add lamp number to the end of the product number. If you are ordering LED lamps you should follow the format below:

• CL - product # - color - lamp - wattage  
CL - 733B - AB - L-EDT3 - 2W-3K

Example: CL-733B-AB-L-EDT3-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.